



BELLOWS FOR HOISTING PLATFORM

- Prevention of impediment of the hoist pantograph
- Protection from dust, dirt or foreign particles


EXAMPLES OF APPLICATION:

- Closing of upright doors
- Protection of level changing in assembly lines of the manufacturing industry
- Closing of storehouse rooms and interspaces
- Base protection of medical equipment




Systems for fastening Bellows for Lift Tables

I




Solution with sheet steel, aluminum or PVC flange. Shape and holes per customer drawings.

B



Solution with sheet steel, aluminum or PVC flange. Shape and holes per customer drawings.


E



Solution with rapid VELCRO connection. This solution offers:


- Rapid application and removal of the cover
- Low cost

CI




Bellows inner collar. Suitable for screw fastening.

CE




Bellows outer collar. Suitable for screw fastening.

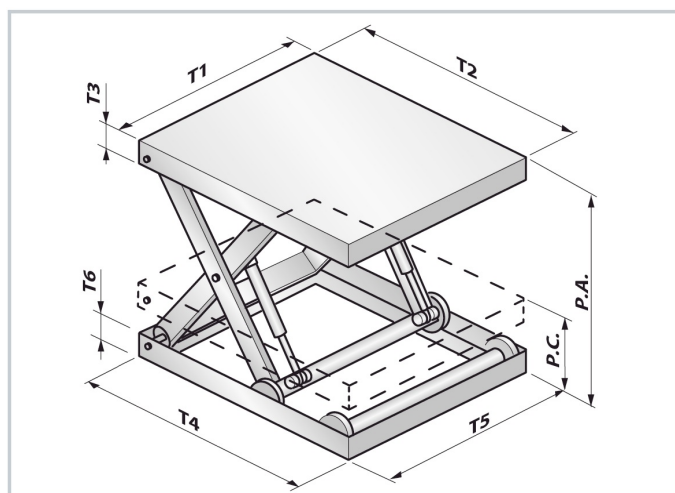

Questionnaire for HOISTING PLATFORMS:

T1 = mm
T2 = mm
T3 = mm
T4 = mm
T5 = mm
T6 = mm
P.A. = mm
P.C. = mm
NP = mm
Upper side fastening ☐ I ☐ B ☐ E ☐ CI ☐ CE
Lower side fastening ☐ I ☐ B ☐ E ☐ CI ☐ CE

QL-RETT

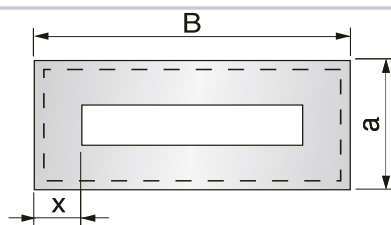

Questionnaire for hoisting platforms BELLOWS:

a = mm
B = mm
X = mm

Note:

Client

E-mail

Quantity

Date

NOTE: The data fields and/or tables marked by are the least ones to be filled in order to give you a quotation. Please send an e-mail to info@pei.eu or a fax to +39 051 6464840.