
QUESTIONNAIRE FOR X-Y SHIELDS

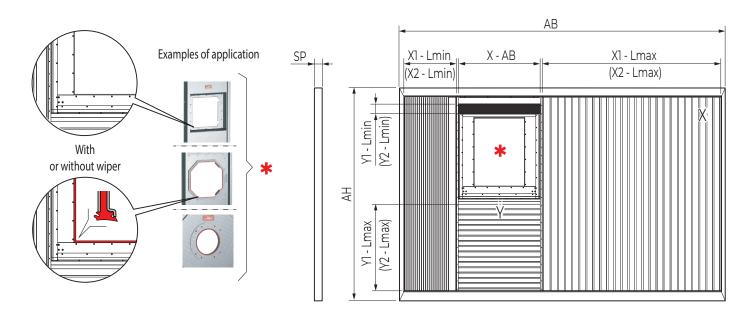

* Spindle opening upon Customer's drawing

| Company name: | | | | | | | | |
|---------------|--|--|--|--|--|--|--|--|
| E-mail: | | | | | | | | |
| | | | | | | | | |
| nd: | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| nd: | | | | | | | | |

| Outside structur | re: |
|------------------------|-----------------------------------------|
| YES 🖵 | NO 🖵 |
| Available outside | e space: |
| AB | mm / AHmm |
| Available depth | (SP):mm |
| Type of bellows: | |
| With lamination \Box | Without lamination 🖵 High temperature 🖵 |
| X-Axis: | |
| X1 - Lmax (open | length or stroke)mm |
| X1 - Lmin (closed | length)mm |
| X2 - Lmax (open | length or stroke)mm |
| X2 - Lmin (closed | d length)mm |
| X-AB width | mm |
| Y-Axis: | |
| Y1 - Lmax (open | length or stroke)mm |
| Y1 - Lmin (closed | length)mm |
| Y2 - Lmax (open | length or stroke)mm |
| Y2 - Lmin (closed | l length)mm |
| Wiper: | |
| YES 🖵 | NO 🗖 |
| Max. travel spee | d: m/min. |
| Max. acceleratio | n: g |
| Type of shavings | 5: |
| | |
| Liquids to which | the covers will be exposed: |
| | |
| Moulding bourse | h |

NOTE: The data fields and/or tables marked by are the least ones to be filled in order to give you a quotation. Please send an e-mail to info@pei.it or a fax to +39 051 6464840.